

Specification Sheet

Electrical & Output data

Length	313mm	500mm	605mm	1000mm	1190mm
No: of LEDs	9	15	18	30	36
Lamp Load	9W	15W	18W	30W	36W
Lamp	Nichia LED(white)				
Lumen Output	2668 lm/m(2700K)				
Color temp.	2700K , 3000K, 4000K, 5000K, 6500K				
CRI	CRI > 80 (Custom 90+ available on request)				
Binning	One Bin, 3-step				
Beam Angle	15° , 20° , 35° , 50° , 10° x 40°				
Operating Temp	-40° C to 50° C				
Lamp life	L70 @ 50,000hrs				
Input Voltage	24Vdc				
Driver	Remote driver				
Control type	On/Off, 0-10,DMX, DALI				



Performance data (for 1000 mm)


Power consumption	30W				
Supply voltage	24Vdc				
Supply current	1250 mA				
Luminous flux (lm)	2700K	3000K	4000K	5000K	6500K
	2668	2791	3005	3060	3289

Code Builder

Product	Finish	Length	Colour	Beam	Mounting	Control	Accessory
Quantum	AS - Anodized	03 - 313mm	27K - 2700K	15 - 15°	LTS - Large Tiltstand STS - Small Tiltstand SIC - Snap in clips	SWD- On/Off DAL - DALI 010- 0-10 DMX- DMX	GS - Glare Shield SL - Symmetric Louver AL - Asymmetric Louver XX - None
	Silver	05- 500mm	30K - 3000K	20 - 20°			
	BK - Black	06- 605mm	40K - 4000K	35 - 35°			
	WT - White	10- 1000mm	50K - 5000K	50 - 50°			
		12- 1200mm	65K - 6500K	A1 -10° x40°			

Sample Code: **QUANTUM - WT - 05 - 40K - 15 - LTS - DAL - XX**

Optics

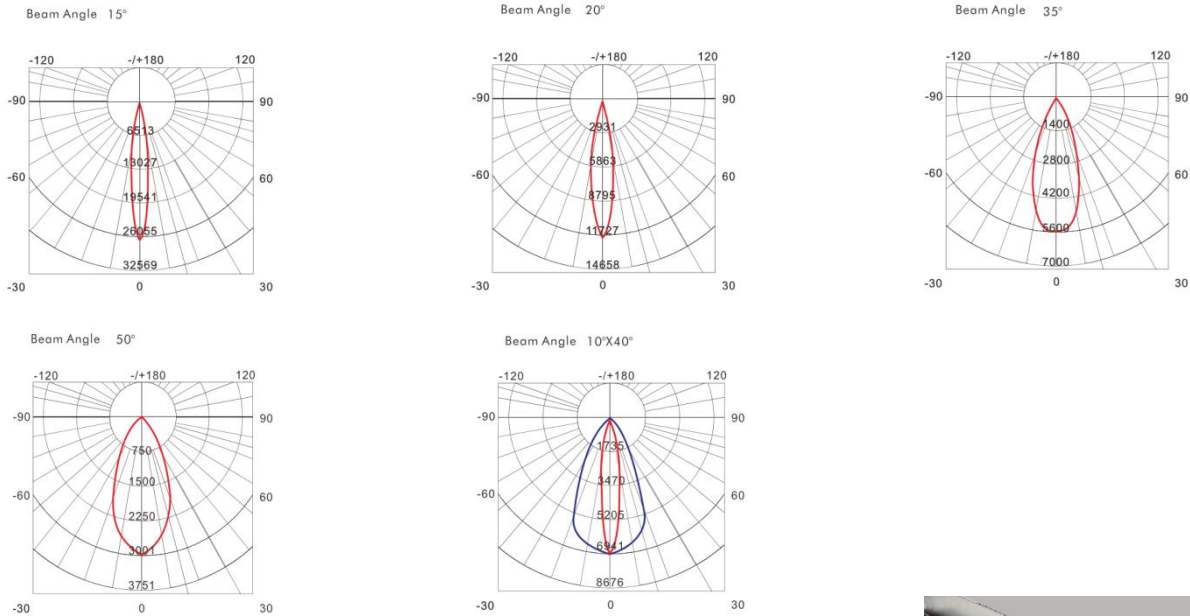

Mechanical Feature

Finish	Anodized Silver, Black, White
Material	Extruded Aluminum alloy
Cover	Silk Screened Tempered Glass
IP Rating	IP66
IK Rating	IK08
Mounting type	Tiltstand, snap in clips
Dimension	34.4mm(H) x 53mm(W) x L (varies)
Connector type	Weatherproof 2-pin(DC)
Cable length	300mm in and out cable



Louver













Female cable connector end



Male connector cable end

Dimension

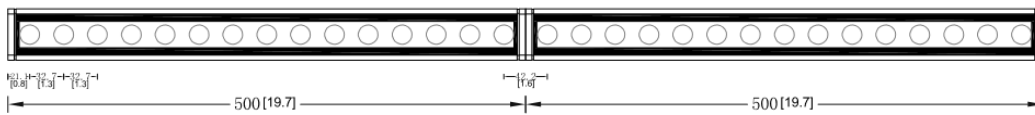


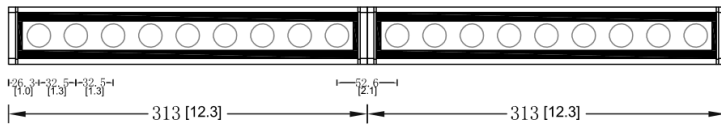
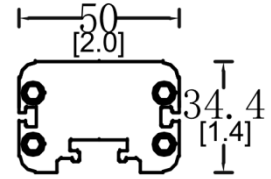
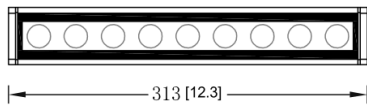






LinearLyte

Quantum


Monochrome

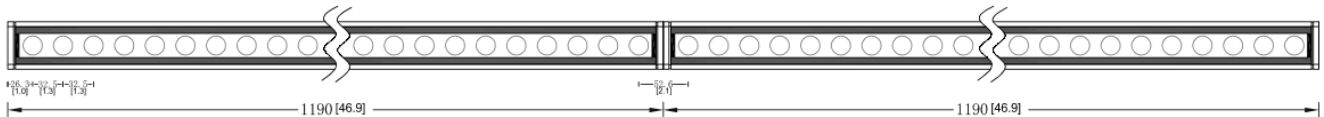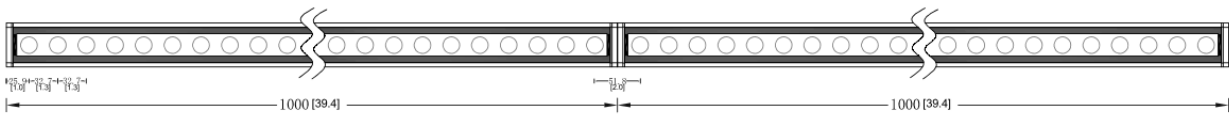


GS(Glare Shield)




SL(Symmetric Louver)




AL(Asymmetric Louver)



LTS(Large Tiltstand)

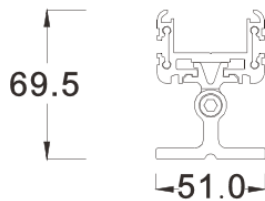

STS(Small Tilt Stand)

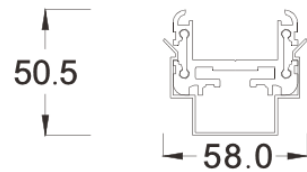

SIC(Snap in Clips)